
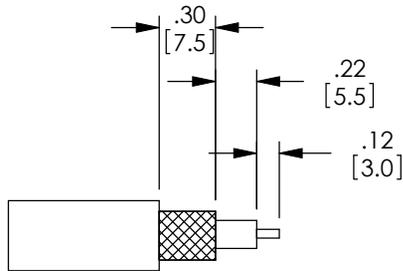



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	ECN 4720: UPDATED DRAWING AND NEW FORMAT	5/4/10	D.FRISIELLO
C	ECN 4752: REVISED FREQUENCY RANGE TO 6 GHz	5/19/10	D.FRISIELLO
D	ECN 5802: CHANGED FREQ. RANGE TO 0 ~ 4 GHz, REVISED PACKAGING NOTE	11/2/11	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
DIELECTRIC	TFE	-
CENTER PIN	BRASS	GOLD PLATE
RETAINING RING	BRASS	NICKEL PLATE
GASKET	RUBBER	-
FERRULE	BRASS	NICKEL PLATE
CAP	BRASS	NICKEL PLATE

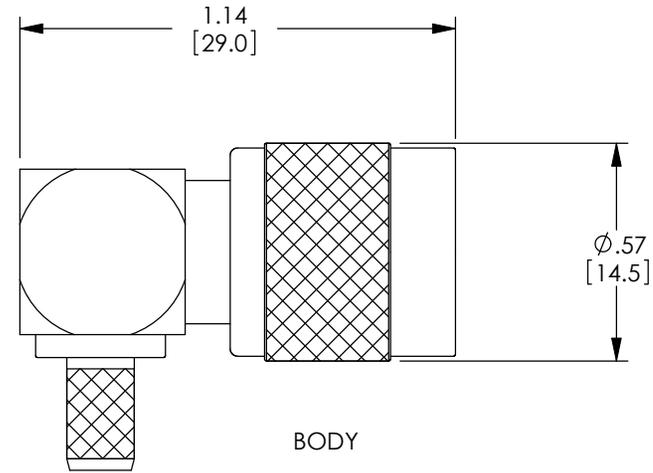

RECOMMENDED CABLE STRIPPING



RECOMMENDED FERRULE CRIMP

NOTES:

ELECTRICAL:
 IMPEDANCE: 50 OHM
 FREQUENCY RANGE: 0 ~ 4 GHz
 VOLTAGE RATING: 1500 VOLTS PEAK
 DIELECTRIC WITHSTANDING VOLTAGE: 2500 VOLTS RMS

PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

MISCELLANEOUS:
 CABLE RETENTION: 30 LBS. PULL.
 APPLICATION: RG58, LMR195 AND EQUIVALENT.
 ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	4/30/10		CATEGORY COAXIAL
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY K.BURGNER	4/30/10	PRODUCT DESCRIPTION CON, RP-TNC P R/A CRIMP LMR195	
	APPROVED BY K.BURGNER	4/30/10	SIZE A	FSCM NO. 43321
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		DWG. NO. ARTP-1714	REV. D
COLOR VARIATIONS MAY OCCUR		SCALE: NONE CAD FILE: ARTP-1714.SLDDRW SHEET 1 OF 1		