

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	04/24/17	RCLARK

D

C

B

A

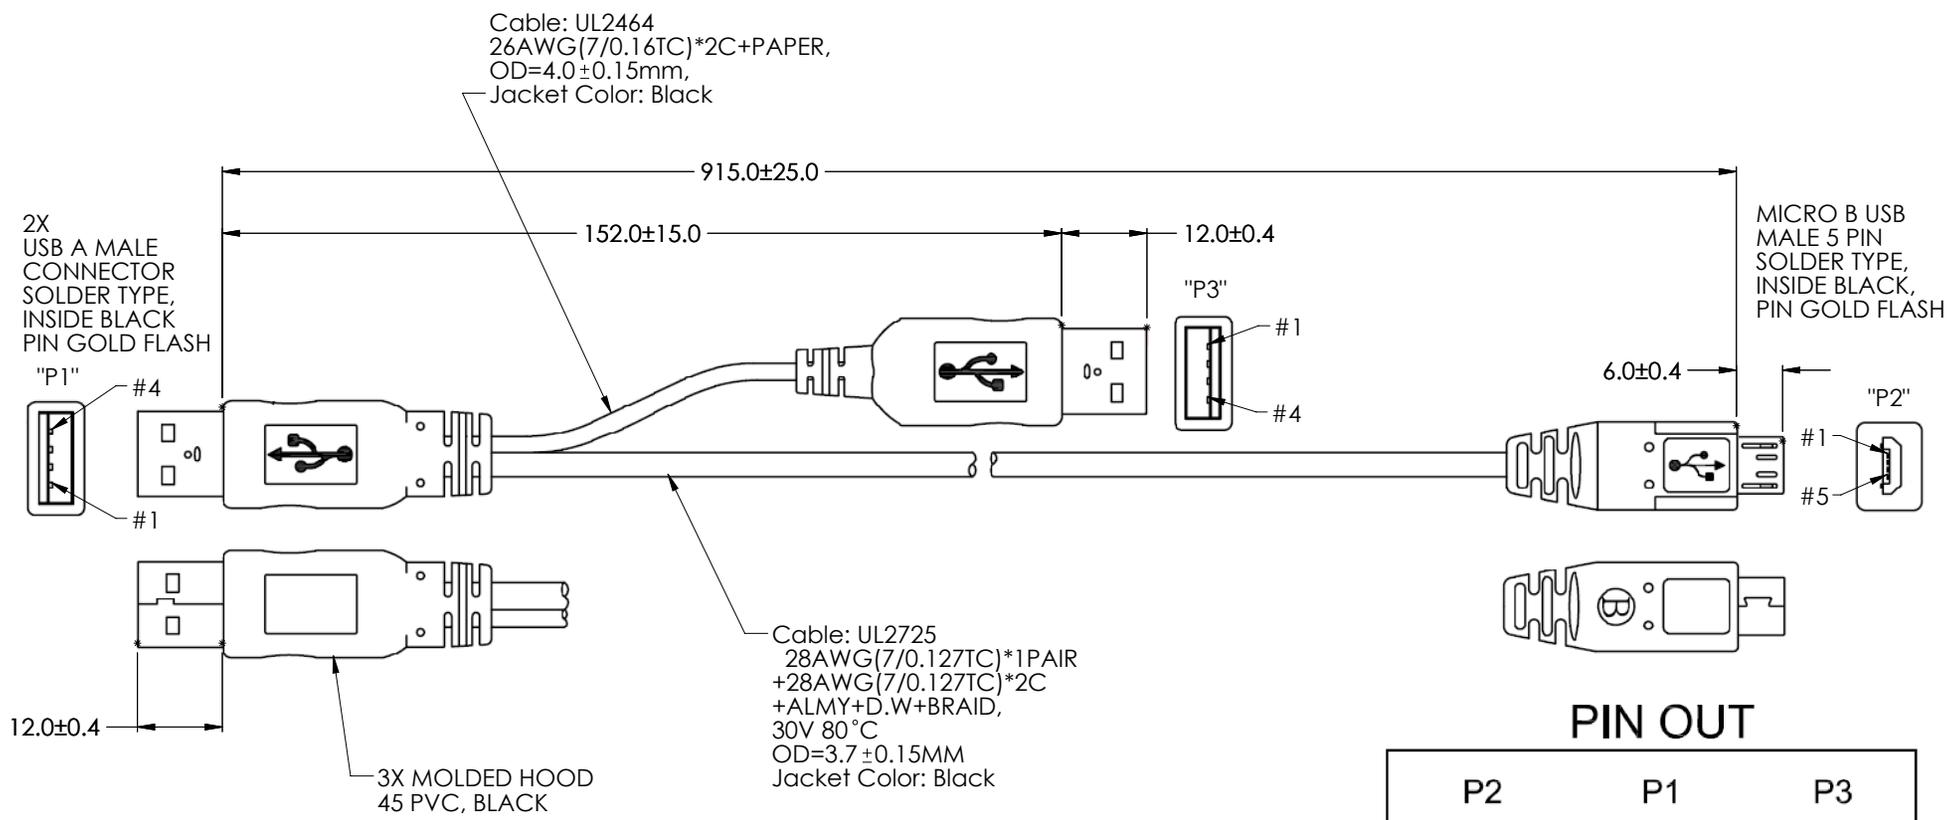

PIN OUT

P2	P1	P3
1	1	1
2	2	
3	3	
5	4	4
S	S	

NOTES:

- TESTING:**
1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY

- ELECTRICAL PROPERTIES:**
2. CABLE SHALL BE 100% ELECTICALLY TESTED
3. VOLTAGE TEST: DC 300V 10ms
INSULATION RESISTANCE: 5.0M ohm/min
CONDUCTANCE RESISTANCE: 5.0 ohm/max

- MACHINERY CHARACTER:**
1. ALL DIMENSIONS ARE "mm" UNLESS OTHERWISE SPECIFIED
2. CABLE SHOULD BE CLEAN AND FREE OF OIL, FLASH, AND BURRS

REGULATORY COMPLIANCE:
CE 2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS R.CLARK	DATE 4/20/2017		50 HIGH STREET NORTH ANDOVER, MA 01845	
	CHECKED BY B.GATES	DATE 4/24/2017		CATEGORY USB	
	APPROVED BY B.GATES	DATE 4/24/2017	PRODUCT DESCRIPTION USB A TO MICRO B-USB Y SPLIT	SIZE A	FSCM NO. 43321
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	DWG. NO. CAUAMICBY	SCALE: NONE	CAD FILE: CAUAMICBY.SLDDRW
	COLOR VARIATIONS MAY OCCUR	SHEET 1 OF 1			