




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/28/17	R.CLARK

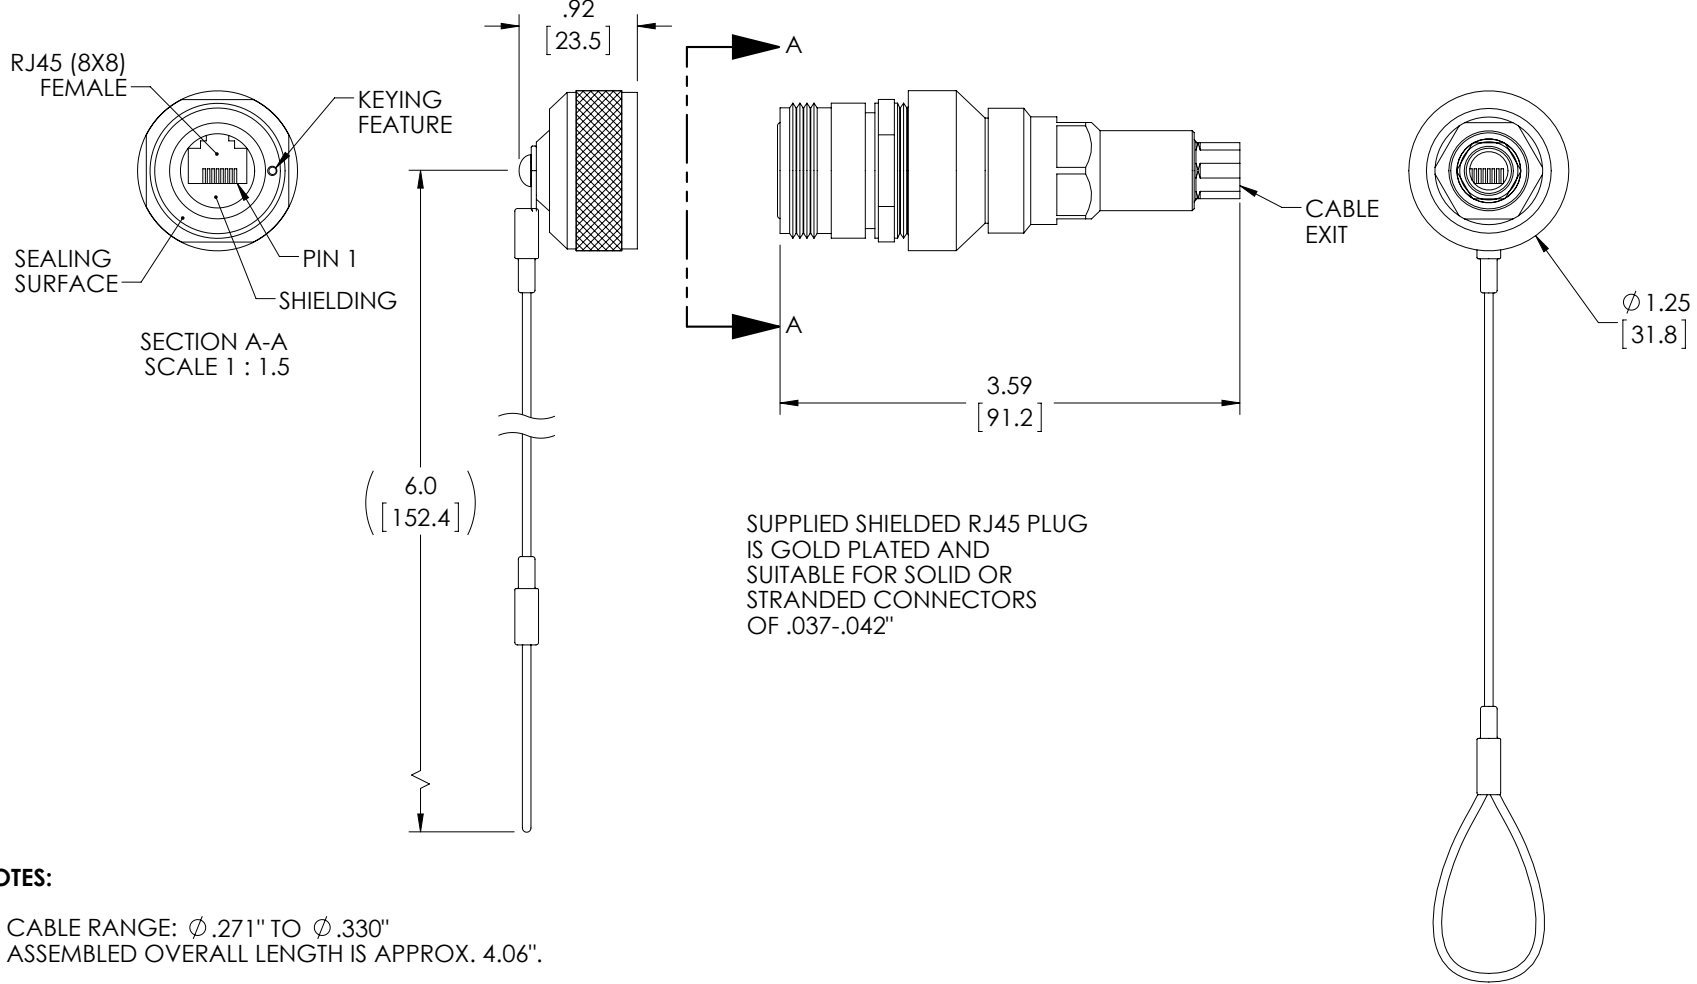

NOTES:

- CABLE RANGE: $\phi .271"$ TO $\phi .330"$
ASSEMBLED OVERALL LENGTH IS APPROX. 4.06".
- MATERIAL:
CONNECTOR: ALUMINUM, ZINC NICKEL (OLIVE DRAB).
HARDWARE: STAINLESS STEEL.
SEALS: SILICONE/NITRILE.
LANYARD: STAINLESS STEEL (NYLON COATED).
- RATED IP-68.
PERFORMANCE MEETS OR EXCEEDS CATEGORY 6 ANSI/EIA 568-C.
- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION LSP-010-1. SHIPS UNASSEMBLED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± .2 [5.08] XX = ± .02 [51] XXX = ±.005 [13]	APPROVALS	DATE	 Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY R.CLARK	6/28/17		
	CHECKED BY M.MARTINEZ	7/20/17	CATEGORY	TELECOM/MODULAR
	APPROVED BY DJG	7/21/17	PRODUCT DESCRIPTION	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		C6 RCP SHLD ZNNI .271-.330 DC		
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. ECSP5103UB0
		SCALE: NONE	CAD FILE: ECSP5103UB0.SLDDRW	REV. A
		SHEET 1 OF 1		