



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	12/16/2024	SLI	WLI

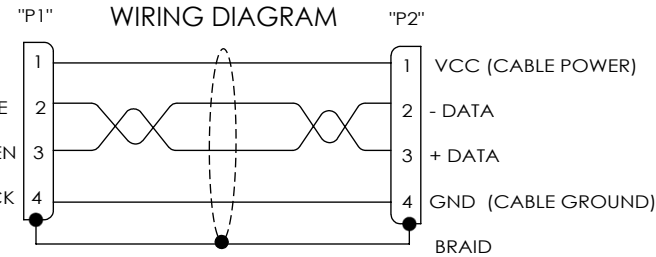

HIGH FLEX USB2.0 CABLE  
ONE 26AWG STRANDED TINNED COPPER TWISTED PAIR  
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS  
OVERALL ALUMINIZED POLYESTER SHIELD AND TINNED  
COPPER BRAIDED SHIELD.  
PVC OUTER JACKET, DARK BLUE(NOM. DIA. .217[5.5])

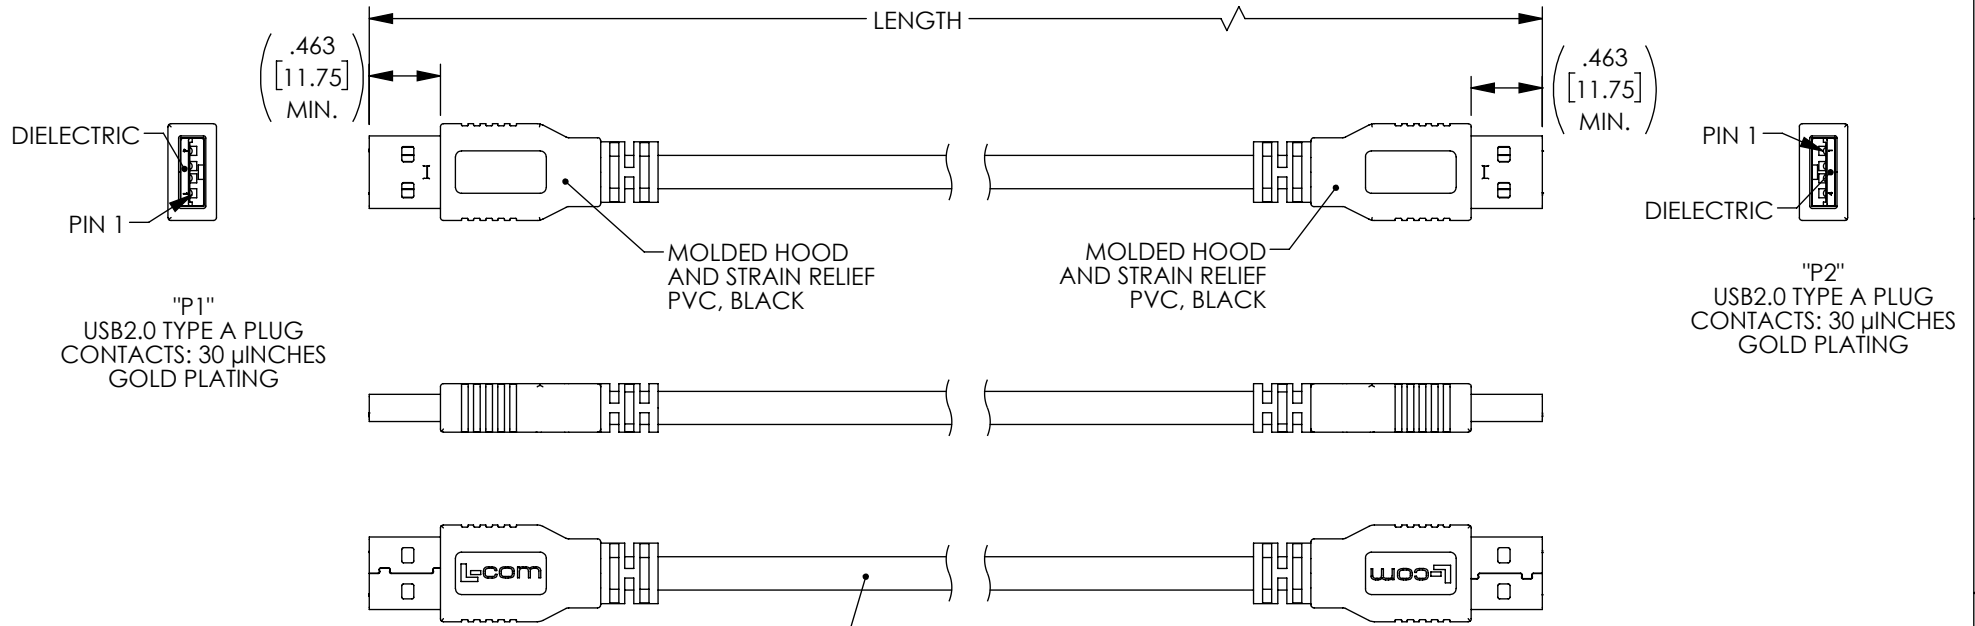

PART NUMBER	LENGTH METERS[FEET]
LCC201008-1M	1.0[3.28]
LCC201008-2M	2.0[6.56]
LCC201008-3M	3.0[9.84]
LCC201008-5M	5.0[16.40]

#### NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

#### REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITI brand		50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936			
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY SLI		11/18/2024		CATEGORY  USB					
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] .XX = ± .02 [.5] .XXX = ± .005 [.13]		CHECKED BY WLI		11/18/2024							
		APPROVED BY WLI		11/18/2024							
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION		CA USB2.0 A-M/A-M HI-FLEX DRAG CHAIN							
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 43321		ITEM NO. LCC201008		REV. A	
REF		SCALE: NONE		CAD FILE: LCC201008.SLDDRW		SHEET 1 OF 1					