


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES TD8P8CK-OD1 AT REV D	11/13/14	D. CASTRO

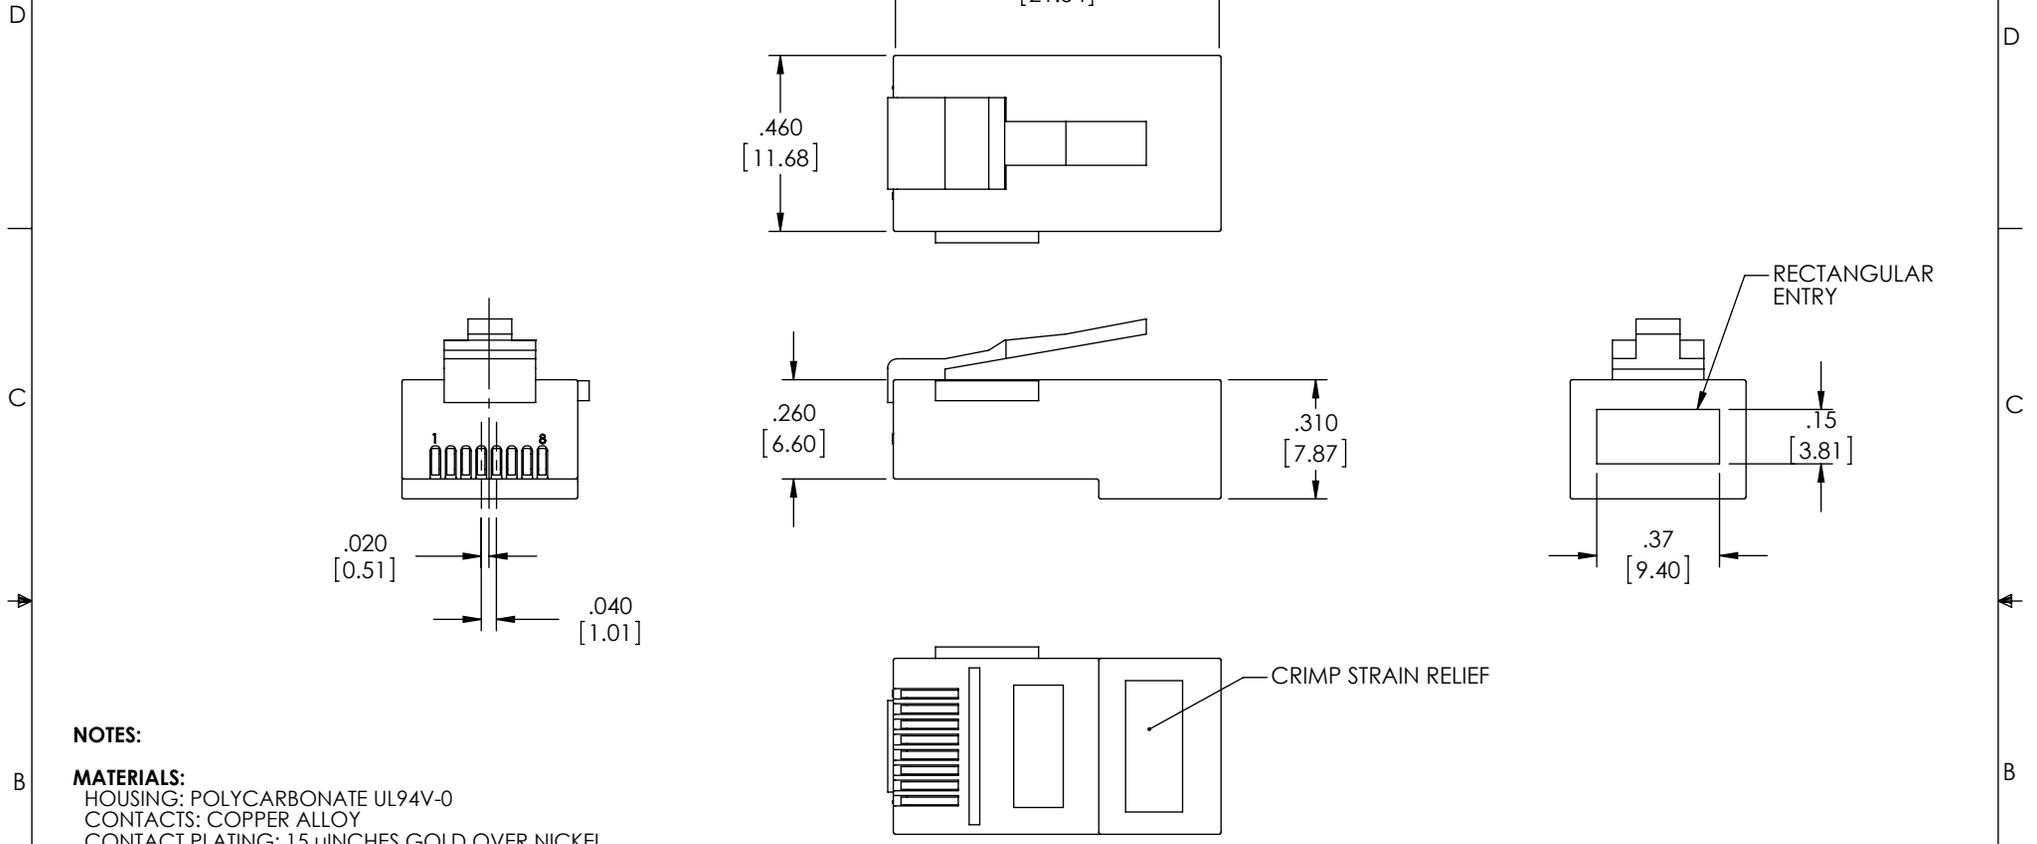

NOTES:

MATERIALS:
 HOUSING: POLYCARBONATE UL94V-0
 CONTACTS: COPPER ALLOY
 CONTACT PLATING: 15 μINCHES GOLD OVER NICKEL

ELECTRICAL:
 CURRENT RATING: 2.0 AMP MAX
 VOLTAGE RATING: 250 VAC MAX
 INSULATION RESISTANCE: 500 MΩ MIN

MECHANICAL:
 CONDUCTOR ACCEPTANCE: 24 TO 28 AWG
 MAX CONDUCTOR OD: .038"
 CONDUCTOR TYPE: STRANDED OR SOLID
 CONTACT STYLE: TWO PRONG

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -40°C TO +85°C

MISCELLANEOUS:
 DIMENSIONS ARE FOR REFERENCE ONLY.
 COMPONENT SHALL BE BULK PACKAGED 100 PIECES PER BAG IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

*CONTACTS SHOWN CRIMPED

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D. PARHAM	3/27/2002				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	CHECKED BY T. CLARK	3/28/2002	CATEGORY TELECOM/MODULAR			
	APPROVED BY C. McCORMICK	3/28/2002	PRODUCT DESCRIPTION PLUG, RJ45K(8X8)K FLT CBL			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. TD8P8CK	REV. A
			SCALE: NONE	CAD FILE: TD8P8CK.SLDDRW	SHEET 1 OF 1	