
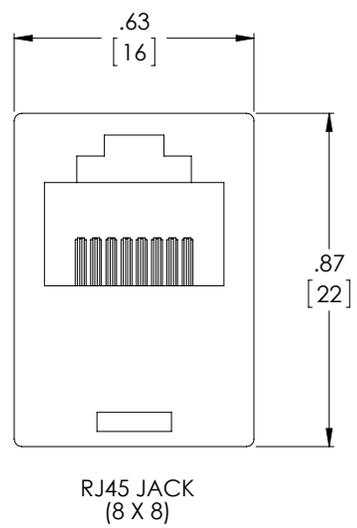
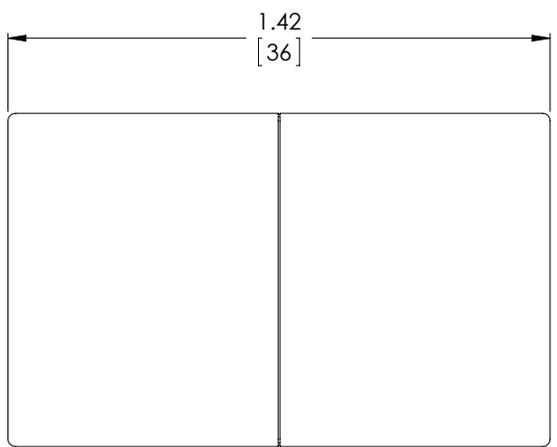


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-------------------------|---------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | REPLACES TDG1026-8C-OD1 | 6/24/14 | D. CASTRO |
| | | | |
| | | | |

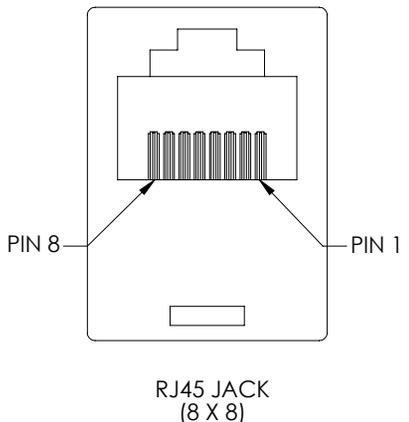

SPECIFICATIONS:

MEETS REQUIREMENTS OF FCC PART 68.5
 UL94V-0 COMPLIANT
 CSA CERTIFIED: CUL
 CATEGORY 3 RATED

MATERIALS:

HOUSING: ABS
 COLOR: IVORY
 CONTACTS: PHOSPHOR BRONZE
 CONTACT PLATING: 15 μINCHES GOLD OVER NICKEL

ELECTRICAL:

CURRENT RATING: 1.5 AMP MAX
 VOLTAGE RATING: 1000 VOLTS

ENVIRONMENTAL:

OPERATING TEMPERATURE RANGE: 0°C TO 60°C

APPLICATION:


FEED THROUGH COUPLER

MISCELLANEOUS:

COUPLER SHALL BE TESTED FOR CONTINUITY.
 COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU (RoHS DIRECTIVE)



| | | | | | |
|--|------------------------------|--|---|-----------------------------|------------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.3] | APPROVALS DRAWN BY TJC | DATE 10/2/01 | 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 | | |
| | CHECKED BY DFP | DATE 10/4/01 | | CATEGORY TELECOM/MODULAR | |
| | APPROVED BY RC | DATE 10/9/01 | PRODUCT DESCRIPTION MODULAR COUPLER 8X8 STRAIGHT | | |
| | PROJECTION | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 | DWG. NO. TDG1026-8C |