





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/22/10	D.GRIFFIN
B	ECN 4654: 1.50 WAS 1.54, ADDED DIMS ARE FOR REF & CONTINUITY TEST	4/1/10	D. CASTRO


"J1"  
SERIES A  
USB FEMALE  
CONNECTOR



WIRING MAP	
"P1"	"J1"
1	1
2	2
3	3
4	N/C
5	4
SHELL	SHELL

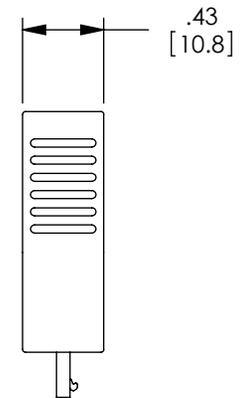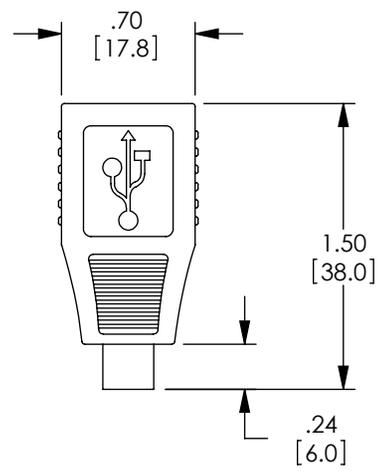

"P1"  
MICRO-B5  
MALE  
CONNECTOR



**NOTES:**

**MATERIAL:**

INSULATOR: PBT, UL 94V-0  
CONTACT: BRASS, GOLD PLATE OVER NICKEL.  
HOOD: PVC, LIGHT GRAY


**FINISH:**

SHELL: NICKEL SILVER.

**MISCELLANEOUS:**

ALL DIMS ARE FOR REFERENCE ONLY.  
COMPONENT SHALL BE TESTED FOR CONTINUITY.  
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005  ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	3/17/10	
	CHECKED BY M.MARTINEZ APPROVED BY S.SMITH	3/17/10	3/17/10
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY  COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION <b>ADPT, USB A-F/MICRO B5-M</b>	SIZE <b>A</b> FSCM NO. <b>43321</b> DWG. NO. <b>UAD032FM</b> REV. <b>B</b>
SCALE: NONE		CAD FILE: UAD032FM.SLDDRW	
			SHEET 1 OF 1