
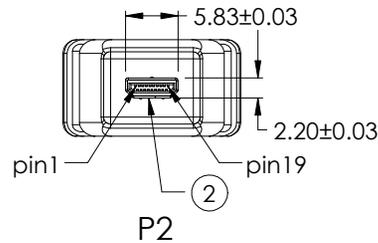
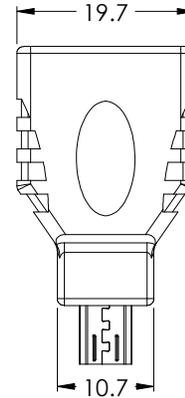




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/03/17	J.YOU

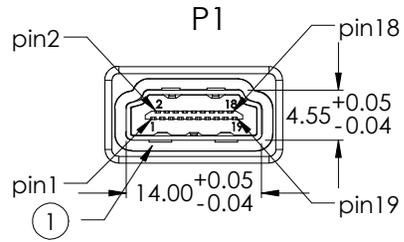

PIN OUT

P1	P2
19	01
14	02
01	03
02	04
03	05
04	06
05	07
06	08
07	09
08	10
09	11
10	12
11	13
12	14
13	15
17	16
15	17
16	18
18	19
SHELL	SHELL

NOTES:

Electrical Properties:

1. It should be no any open/short, miswiring and intermittent failures.
2. The cable shall be 100% electrical test.
3. Voltage test: DC 300V 10MS;
Insulation resistance: 5.0M ohm/min;
Conductance resistance: 5.0 ohm/max.

Machinery Character:

1. All dimension are "mm" except specified.
2. The cable should be clean, free of oiled/flash/burred.
3. Package: individually packaged in a clear polybag.
4. Cable Ass'y shall be RoHS Compliant.

3	Outer molded: 45P PVC, Color: Black.	G	10
2	Conn: HDMI 19P D Female, shell & pin gold flash. , insulaton Black.	PCS	1
1	Conn: HDMI 19P A Female, shell & pin gold flash. , insulaton Black.	PCS	1
Item	DESCRIPTION	UNIT	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	APPROVALS	DATE
	DRAWN BY J.YOU	08/03/17
	CHECKED BY B.GATES	08/03/17
	APPROVED BY B.GATES	08/03/17
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
	COLOR VARIATIONS MAY OCCUR	

		50 HIGH STREET NORTH ANDOVER, MA 01845	
CATEGORY		AUDIO/VIDEO	
PRODUCT DESCRIPTION			
HDMI 19P A(F) TO MICRO D(M)			
SIZE A	FSCM NO. 43321	DWG. NO. VHC00015	REV. A
SCALE: NONE		CAD FILE: VHC00015.SLDDRW	
		SHEET 1 OF 1	